




WO 2006/095932 PCT/JP2006/310940


FIG.2

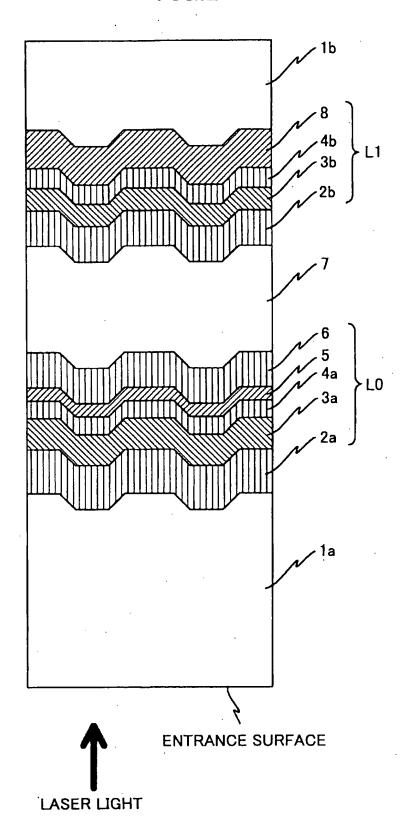

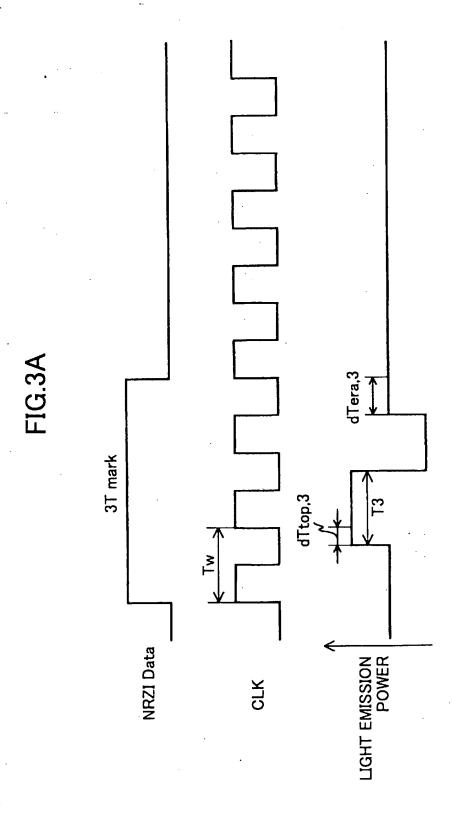


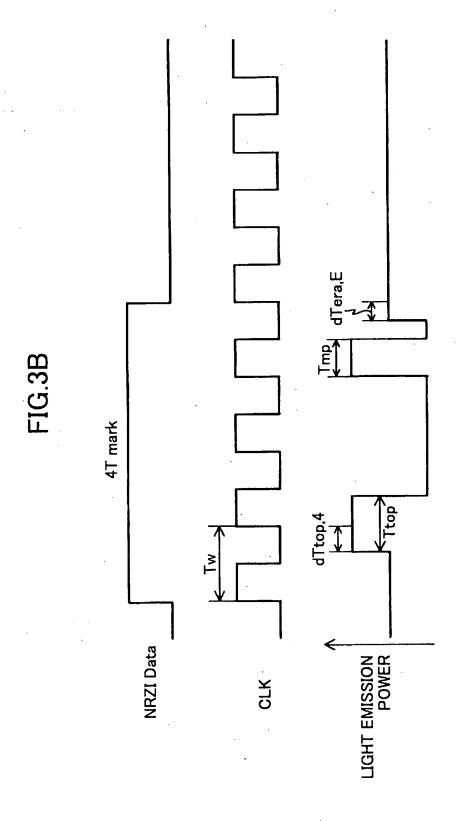




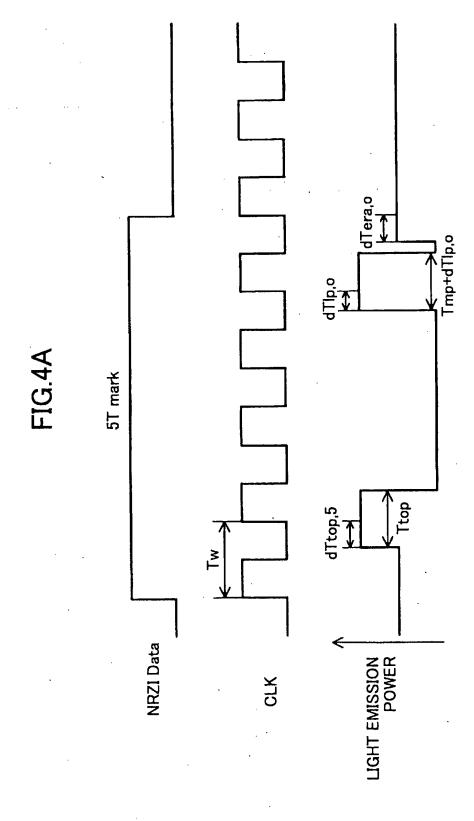



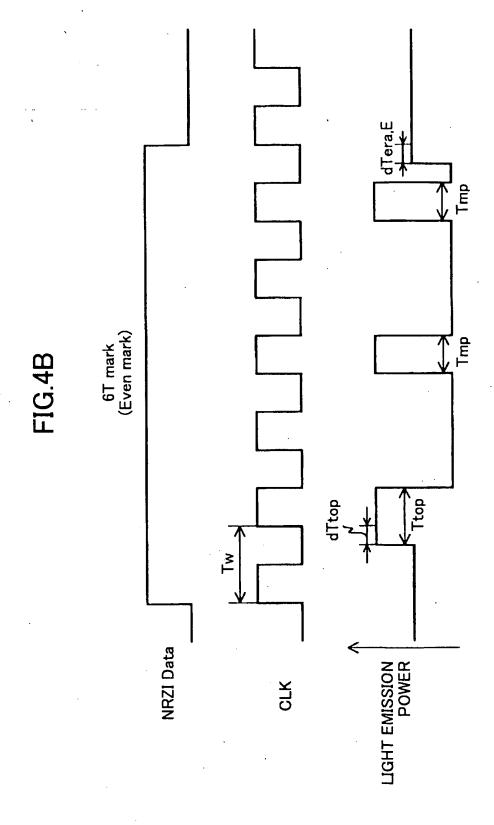

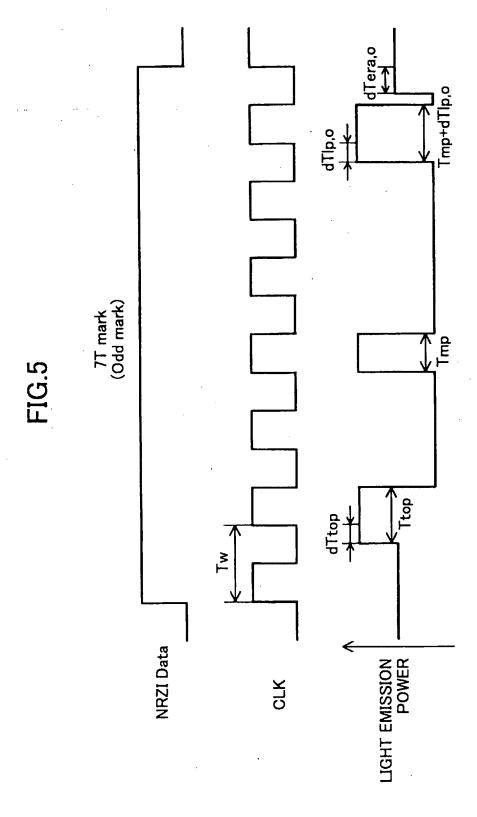




WO 2006/095932 PCT/JP2006/310940

FIG.6

PARAMETER	LO	L1
OPTIMUM WRITE POWER (Pw)	42mW	50mW
Pe/Pw	0.4	0.43
Tmp	0.56	0.63
Ttop	0.50	0.56
dTtop	0.00	0.00
Т3	0.75	0.81
dTtop,3	-0.13	-0.13
dTera,3	0.25	0.13
dTtop,4	0.00	0.00
dTera,E	0.38	0.38
dTtop,5	0.00	0.00
dTlp,o	0.00	0.06
dTera,o	0.38	0.38



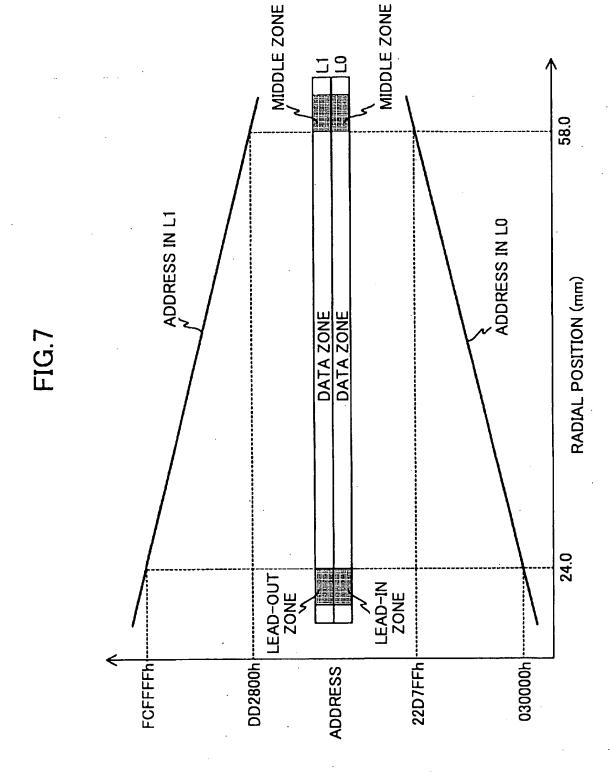

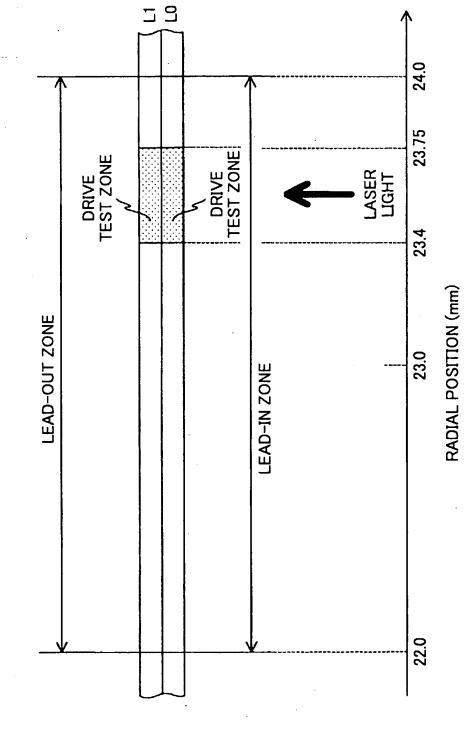


FIG. 8



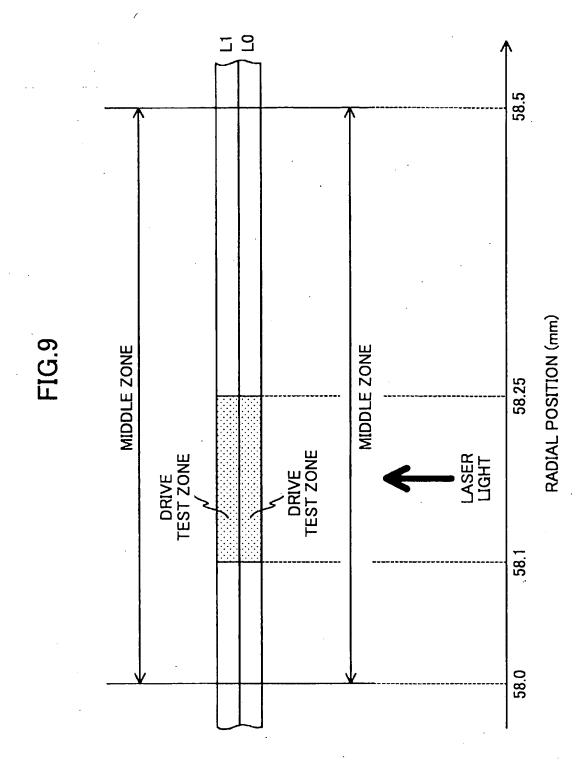


FIG.10

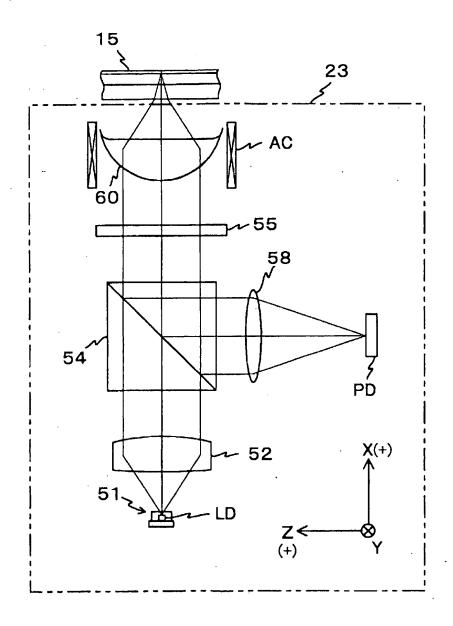

13/15

FIG.11

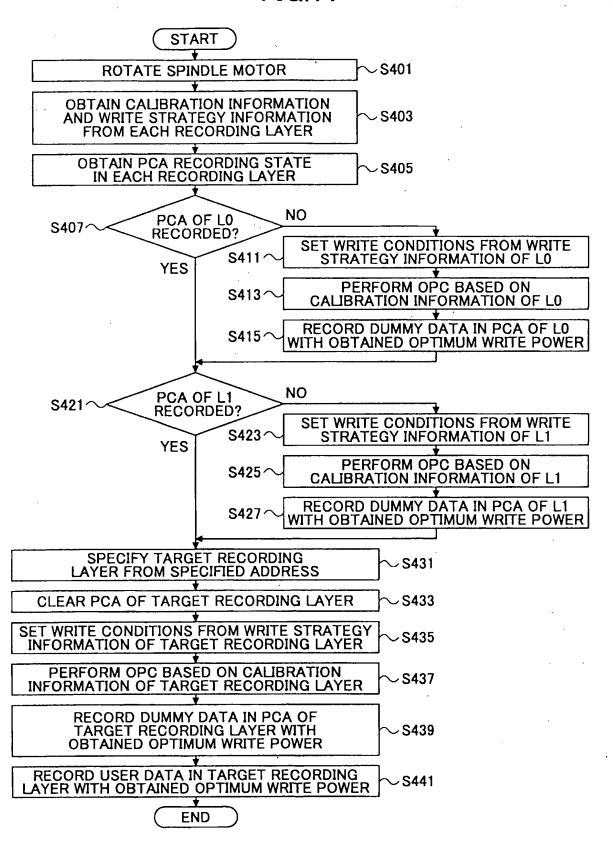

14/15

FIG.12

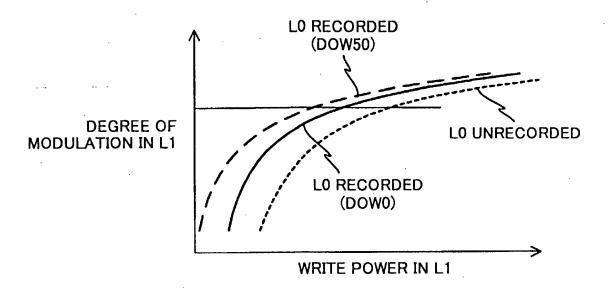


FIG.13

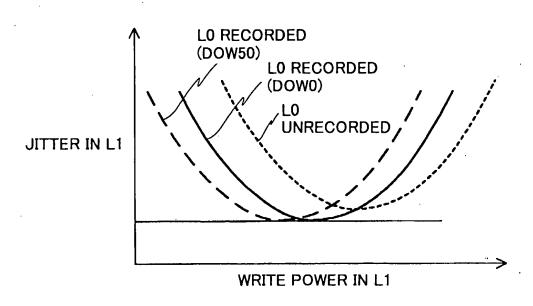


FIG.14

